

Test Equipment

Product Catalogue



Matchmaster Catalogue



Digital TV Signal Finder

12MM-DF02

- » Designed to ensure that you position and angle your digital TV antenna in the correct direction for best reception
- » Suitable for the home, caravan, boating and leisure enthusiast
- » Provides LED lights to show signal strength for antenna adjustment
- » Easy to use, compact design
- » Includes 9V battery



Combination Signal Meter for DVB-T/T2 and DVB-S/S2

12MM-DSTM1

- » DVB-T/T2 and DVB-S/S2 measurements
- » AV input and output suitable for testing and aligning CCTV cameras
- » Built in DC voltage insertion for powering amplifiers and satellite LNB's
- » HD 5" TFT LCD screen with MPEG2/4 digital tuner built in with HDMI output of content
- » USB 2.0 for software updates and media playback
- » Large lithium battery capacity of 4000mAh



Televés H30EVOLUTION DVBS/S2 + DVBT/T2 with Wi-Fi & IPTV option

12MM-H30EVO

- » Measures DVB-S/S2 + DVB-T/T2
- » Wi-Fi and IPTV Analyzer can be added with purchase of separate licenses.
- » Multiscreen and remote control through Android/IOS/PC using Wi-fi or Bluetooth allowing remote monitoring, wireless control and channel editing
- » Guided Satellite Pointing allowing for quick and accurate dish pointing
- » Wideband satellite measurements to 2400MHz to suit stacked signals in dSCR and dCSS systems
- » Included as standard all the great features and ease of use of the H30 range



Signal Meter with DVB-T and DVB-S/S2

12MM-H30FLEX

- » Compact hand held DVB signal analyser
- » Default DVB-T and DVB-S/S2 as standard
- » Additional Licenses to unlock extra standards DVB-C, T2 and dCSS/SCR functionality
- » Spectrum analyser and built in tuner to view live channels
- » DVB-T powering for masthead amplifiers
- » Optional Licenses: 12MM-T2-LIC - License to activate DVB-T2 function, 12MM-DCSS-LIC - License to activate dCSS & SCR function and 12MM-C-LIC - License to activate DVB-C function

Matchmaster Catalogue



12MM-MOSAIQ6/6-SF Soft Carry Bag

12MM-M6-BAG

- » Soft carry bag for MOSAIQ6/6-SF to allow for meter protection and storage
- » Features extra storage compartments for spare batteries and other accessories
- » Multi length adjustable strap for ease of use
- » Durable design
- » Bag dimensions - 345 x 275 x 150mm



12MM-MOSAIQ6/6-SF Field Swappable Battery

12MM-M6-BATTERY

- » Keep your MOSAIQ6/6-SF operating with a spare charged battery
- » Lithium Ion (7.2 VDC, 9,000 mAh) swappable in the field
- » Standalone charging so the battery can be charged separate to the meter to allow for continuous use
- » High quality with factory charge cycle providing up to 4hrs field operation
- » Genuine manufacturer replacement battery

Televés Tablet Style Handheld Digital Signal Meter for DVB-T/T2, DVB-C and DVB-S/S2

12MM-MOSAIQ6



- » Multifunction signal analysis compliant with DVB-T, DVB-S/S2, (Measures >2400MHz) DVB-C, FM, DAB/DAB+ and Analogue signals, Wi-Fi and IPTV, Optical tests on 1310nm, 1490nm and 1550nm and 3.3GHz spectrum analyser
- » Allows the demodulation and analysis of IPTV streams (both Unicast and Multicast), not only through video display but also by displaying the total bit rate and the relevant information for each service: SID, VPID, AID, video profile, bit rate for both audio and video.
- » Ultra fast data logging for all DVB-T/T2, DVB-S/S2 and DVB-C meaning less time spent by a technician in commissioning a system. Li-ion (7.2 VDC, 9,000 mAh) easily swappable in the field for long lasting operation.
- » Featuring multiple interfaces - Ethernet, USB, HDMI, audio output (Jack), FC/APC optical fibre connector, GPS antenna connector.
- » 8" TFT touch screen allowing full customisation of multiscreen display and layout of measurement windows
- » Professional spectrum analyser with ultra-fast digital processing (sweep time < 10 ms) and high dynamic range (> 50 dB). Equipped with advanced functions for the detection and analysis of signals in the 5 MHz to 3,300 MHz (waterfall, event triggers, markers, user configurable RBW and VBW, etc.).


Matchmaster Catalogue

Televs tablet style handheld digital signal meter for DVB-T/T2, DVB-C, DVB-S/S2 with Selective F.O 12MM-MOSAIQ6-SF



- » Multifunction signal analysis compliant with DVB-T, DVB-S/S2, (Measures >2400MHz) DVB-C, FM, DAB/DAB+ and Analogue signals, Wi-Fi and IPTV, Selective Fibre Optical tests on 1310nm, 1490nm and 1550nm and 3.3GHz spectrum analyser
- » Allows the demodulation and analysis of IPTV streams (both Unicast and Multicast), not only through video display but also by displaying the total bit rate and the relevant information for each service: SID, VPID, AID, video profile, bit rate for both audio and video.
- » Ultra fast data logging for all DVB-T/T2, DVB-S/S2 and DVB-C meaning less time spent by a technician in commissioning a system. Li-ion (7.2 VDC, 9,000 mAh) easily swappable in the field for long lasting operation.
- » Featuring multiple interfaces - Ethernet, USB, HDMI, audio output (Jack), FC/APC optical fibre connector, GPS antenna connector.
- » 8" TFT touch screen allowing full customisation of multiscreen display and layout of measurement windows
- » Professional spectrum analyser with ultra-fast digital processing (sweep time < 10 ms) and high dynamic range (> 50 dB). Equipped with advanced functions for the detection and analysis of signals in the 5 MHz to 3,300 MHz (waterfall, event triggers, markers, user configurable RBW and VBW, etc.).

Televs tablet style handheld digital signal meter for DVB-T/T2, DVB-C, DVB-S/S2 with Selective F.O 12MM-MOSAIQ6/6-SF Software Licenses

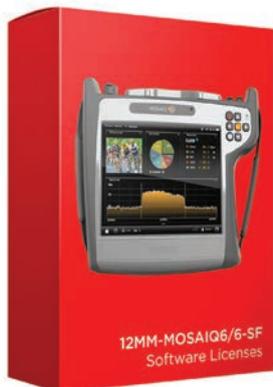

- » Individual software unlocking facilitates the application-specific product activation. You only pay for what you use providing absolute flexibility for signal processing.
- » 12MM-M6-4K allows signal display with 4K resolution (3,840 x 2,160) and supports the new H.265 HEVC video compression format.
- » 12MM-M6-ANALOG allows the measuring of signal levels between 20 dB μ V and 128 dB μ V, C/N up to 30 dB, and V/A up to 52 dB.
- » 12MM-M6-DAB allows power measuring between 20 dB μ V and 128 dB μ V, standard C/N and MER for DAB & DAB+ signal
- » 12MM-M6-GPS allows measurements to be displayed on a map at the very same spot where they were actually taken, facilitating coverage analysis.
- » 12MM-M6-WIFI allows 2.4GHz & 5GHz Wi-Fi band analysis. 5GHz is a much less congested frequency, which means much less interference.

Satellite Finder 13MM-SF95



- » Designed to ensure that you position and angle your digital satellite in the correct direction for best reception
- » Suitable for the home, caravan, boating and leisure enthusiast
- » Needle and adjustment allows correct adjustment of dish
- » Easy to use, compact design



matchmaster.co.nz

0800 AERIAL 237 425

Products may vary from images shown
and all specifications are correct at
time of printing